


# Single Door Under Bench Chillers and Freezers

## Features:

- Lockable door with handles
- Digital controller and digital temperature display
- Adjustable feet
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Refrigerant: R134a
- Ambient temperatures +16°C to +32°C



## MC200H

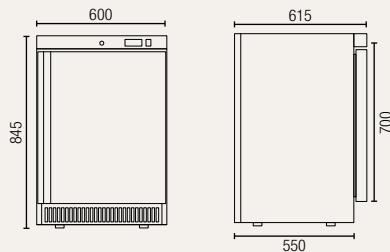


Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 140 L  
**Exterior dimensions in mm:** 600w x 615d x 845h  
**Number of adjustable shelves:** 3  
**Cooling system:** dynamic fan assisted  
**Defrost system:** automatic

**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 49/44 kg  
**Door material:** stainless steel  
**Energy consumption in 24h:** 2 kWh

## MC200G

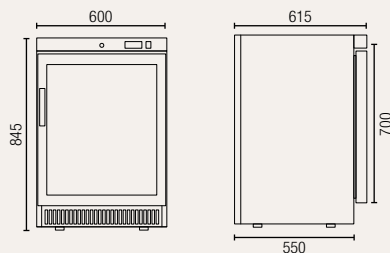

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 140 L  
**Exterior dimensions in mm:** 600w x 615d x 845h  
**Number of adjustable shelves:** 3  
**Cooling system:** dynamic fan assisted  
**Defrost system:** automatic

**Temperature set range:** 0°C to +10°C  
**Gross/net weight:** 49/44 kg  
**Door material:** glass  
**Energy consumption in 24h:** 2 kWh


## MF200H



Fixed top evaporator shelf with railing guard



Sliding drawers for middle and bottom shelf

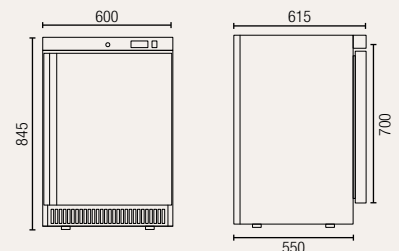

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 140 L  
**Exterior dimensions in mm:** 600w x 615d x 845h  
**Fixed shelves:** 1 + 2 sliding drawers  
**Cooling system:** static  
**Defrost system:** manual

**Temperature set range:** -10°C to -22°C  
**Gross/net weight:** 52/347 kg  
**Door material:** stainless steel  
**Energy consumption in 24h:** 3 kWh