

Single Door Underbench Storage Refrigerators

Features:


- Lockable door with handles
- Digital controller and digital temperature display
- Adjustable feet
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Refrigerant: R134a
- Ambient temperatures +16°C to +32°C



MC200H



RUN OUT MODEL
Limited Stock

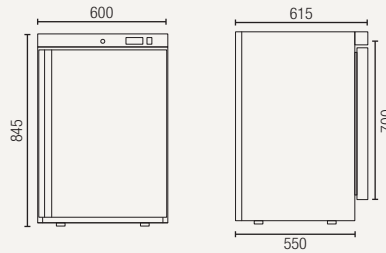

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual


Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: stainless steel
Energy consumption in 24h: 2 kWh

\$1,800.00+GST

MC200G



RUN OUT MODEL
Limited Stock

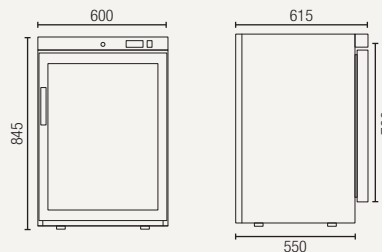

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual

Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: glass
Energy consumption in 24h: 2 kWh

\$1,900.00+GST