specifications


Refrigeration

RF7.UPF.1.SD

ReFlex Series, 1 Door (Solid), Upright Freezer

Project:

Item No:

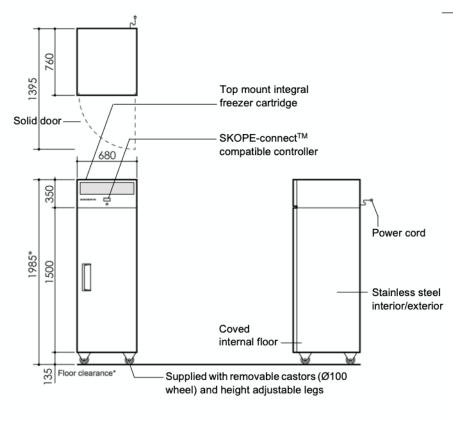



CABINET

Worktop

Doors 1 × self-closing, lockable, reversible, solid swing door. Supplied RH

Internal door opening 1 × door openings: 1375mm high × 555mm wide

Shelves 5 × adjustable height shelves: 540mm wide × 530mm deep

n.a

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class 51

GEMS energy consumption 7.40 kWh/24h

GEMS annual running cost \$811 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class | 5

Interior lighting
Power cord
Power supply
Current draw

1 × 1200mm, 12W LED light (door activated)
Supplied with 2.3m, 10 Amp plug and lead
220-240 Volts a.c. 50 Hz, single phase supply
4.0 Amps (includes unit 3.9 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number

UTKDNI-0019)

Refrigerant R290 / 94g (natural refrigerant)

Nominal capacity 550 Watts

Heat rejection (Avg/peak) 310 Watts/430 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

			_	
)IV	ЛEР	VISI	Or	

DIMENTOION				
	External	Internal		
Height	1985mm*	1395mm		
Width	680mm	560mm		
Depth	760mm	600mm		
Floor area	0.52m ²			
Weight	122kg			
Gross volume	469L			
Net volume	363L			
·				

^{*} With supplied castors fitted. See height variation below

Height variation		
Supplied castors	1985mm	
Supplied height adjustable legs	1995-2035mm	
No castors or legs	1850mm	

Dimensional tolera	nces		
Before installing this tolerances:	cabinet allow the fol	lowing dimensional	
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation red	entilation requirements			
Тор	300mm	Т		
Sides	Not required			
Back	Not required	Ī		
Bottom	Not required	Т		

PSS0590 Rev. 2.21 Aug. 2020



