# SKIPIO

www.commercialfridgefreezer.com.au 1300 733 715

# **TOP MOUNT S SERIES**

SRFT65-3

### \_\_\_ FEATURES / BENEFITS =\_\_

#### HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure are foamed-in-place using high density, CFC free polyurethane insulation.

#### ■HOT GAS CONDENSATE SYSTEM

Through SKIPIO's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but thoroughly prevents the overflow of condensate water.

#### EFFICIENT REFRIGERATION SYSTEM

SKIPIO's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### ■EXTERIOR & INTERIOR OF CABINET CONSTRUCTION

Stainless steel exterior (galvanized steel top, bottom, and back) and stainless steel with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.

#### ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

#### ■DIGITAL TEMPERATURE CONTROL SYSTEM

It provides precise and constant temperature. This level of precision allows the displayed foods to remain fresh over an extended period of time.




Model	Doors	Capacity (Liters)	Shelves	Compressor (HP)	Amps (A)	Net Weight (Kg)	L X D X H (mm)
SRFT65-3	3	575 / 1235	6	1/3 / 3/4	5.5	177	1900x850x1926

# Model: SRFT65-3


SPEC SHEET	SRFT65-3		
Classification	Refrigerator / Freezer		
Cabinet Dimension (WxDxH mm)	1900x850x1926		
Capacity (Liters)	575 / 1235		
Inner Temperature	1°C~8°C / -21°C~-12°C		
Doors	3		
Number of Shelves	6		
Refrigent	R-134a / R-404a		
Compressor (Hp)	1/3 / 3/4		
Cooling Type	Fan cooling type		
Insulation Type	Polyurethane / Cyclopentane + CFC Free		
Temperature Control Type	Digital		
Amps (A)	5.5		
Voltage (V/Hz/Ph)	240V 50Hz 1Ph		
Power (W)	1098		
Weight (Kg)	177		

## **PLAN VIEW**

(unit: mm)

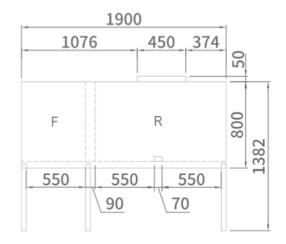

## **TOP VIEW**

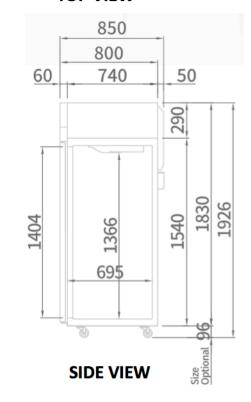





















- ADD: 218 WOODPARK ROAD SMITHFIELD NSW 2164
- TEL: 02-8798-5061/5283/5581
- FAX: 02-8798-5707

