specifications




TMF1000N-AC Series

ActiveCore Series, 2 Door (Glass), Upright Freezer

Project:

Item No:

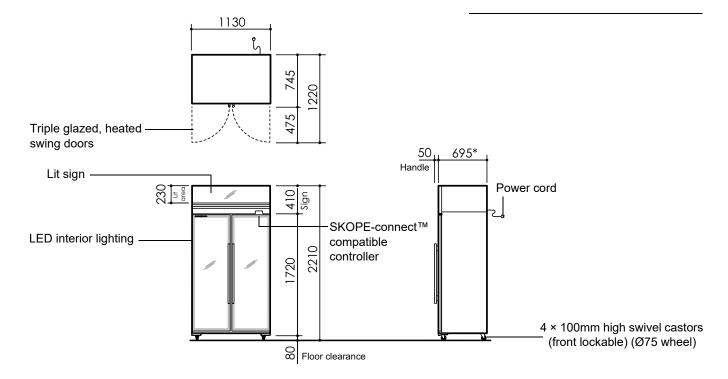

CABINET

Doors 2 × self-closing, triple glazed, single Low-E film, heated, lockable, argon

filled, toughened safety glass swing doors (hinged LH, RH) $\,$

Internal door opening 2 × door openings: 1570mm high × 450mm wide

Shelves 10 × adjustable height wire shelves: 500mm wide × 470mm deep

Sign Lit

Material Powdercoat galvanised steel

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C)

Noise measurement Standard: ≤63.5 dB(A)

Hush Mode: ≤61.5 dB(A)

GEMS class L1

GEMS energy consumption | 16.35 kWh/24h

GEMS annual running cost \$1,790 p.a.(@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5

Interior side lighting 2 × 1400mm, 15W LED Sign lighting 1 × 1060mm, 12W LED

Power cord Supplied with 10 Amp plug and 2.3m lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 5.5 Amps (includes unit 3.5 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth

Refrigeration system Top mounted, integral, removable ActiveCore freezer cartridge

(UTHDNI-0043)

Refrigerant R290 / 107g (natural refrigerant)

Nominal capacity
Heat rejection (Avg./Peak)
Drainage

920 Watts (4500rpm)
680 Watts/825 Watts
No plumbing required

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS

22. 10.0.10		
	External	Internal
Height	2210mm	1570mm
Width	1130mm	1030mm
Depth	745mm	554mm
Floor area	0.84m ²	l .
Weight	225kg	

* Depth 695mm excludes removable door handle and dool lock bracket

980L

Dimensi	ional	to	lerances

Volume

efore	e install	ing this	cabinet	allow	the	follow	ing dimension	al
olera	nces:	•					•	
			-		-			_

Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	10mm	
Bottom	Not required	

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited



PSS0645 Rev. 1.0 Nov. 2021